80 PLUS Verification and Testing Report


| TYPICAL EFFICIENCY (50% Load): | 93.21% |
|--------------------------------|--------|
| AVERAGE EFFICIENCY: | 92.12% |
| 80 DI LIS COMPI IANT: | VES |



| ID Number | 6665 |
|---------------|---------------------|
| Manufacturer | FSP Technology Inc. |
| Model Number | FSP2000-52AGPBI |
| Serial Number | S0201030057 |
| Year | 2021 |
| Туре | ATX12V, EPS12V |
| Test Date | 9/7/21 |


| Rated Specifications | Value | Units |
|----------------------|---------|-------|
| Input Voltage | 100-240 | Volts |
| Input Current | 15-12 | Amps |
| Input Frequency | 60-50 | Hz |
| Rated Output Power | 1500 | Watts |


Note: All measurements were taken with input voltage at 115 V nominal at 60 Hz.

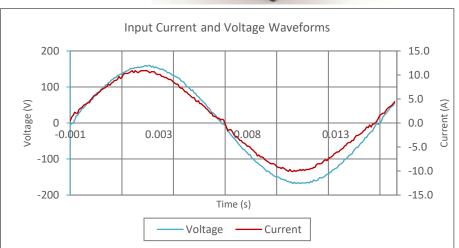

Input AC Current Waveform (ITHD = 3.93%, 50% Load)

| | PF | | | Input | DC Terminal Voltage (V)/ DC Load Current (A) | | | | Output | Efficiency | |
|-------|------|--------|------|---------|--|------------|------------|------------|-----------|------------|------------|
| RMS | PF | ITHD | Loau | Watts | 12V (cumulative of 12V1, 12V2, etc.) | -12V | 3.3V | 5V | 5Vsb | Watts | Efficiency |
| 1.61 | 0.95 | 25.81% | 10% | 176.26 | 12.31/11.51 | 12.04/0.03 | 3.4/1.25 | 5.21/1.25 | 5.21/0.28 | 154.25 | 87.51% |
| 3.00 | 0.98 | 16.64% | 20% | 337.00 | 12.25/23.11 | 12.04/0.07 | 3.39/2.49 | 5.2/2.48 | 5.19/0.55 | 308.20 | 91.45% |
| 7.17 | 1.00 | 3.93% | 50% | 821.30 | 12.21/57.65 | 12.05/0.17 | 3.33/6.23 | 5.13/6.18 | 5.11/1.38 | 765.52 | 93.21% |
| 14.25 | 1.00 | 2.89% | 100% | 1635.10 | 12/114.93 | 12.07/0.34 | 3.23/12.48 | 5.03/12.34 | 5/2.75 | 1499.40 | 91.70% |

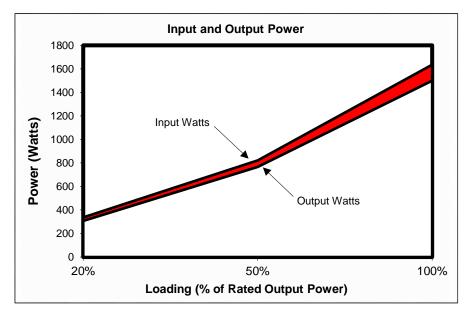

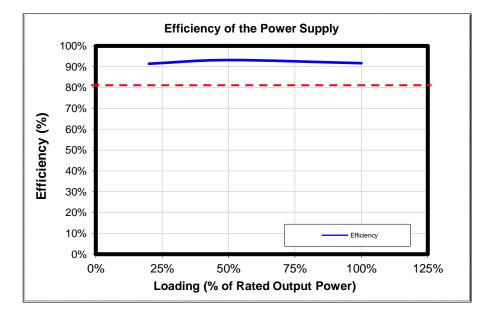



These tests were conducted by a third party independent testing firm on behalf of the 80 PLUS Program. 80 PLUS is a certification program to promote highly-efficient power supplies (greater than 80% efficiency in the active mode) in technology applications. http://www.80plus.org/